


Imported From **WEFLO** Company
Y - Type Strainer, Flanged Ends

Specification

- Meet or exceed the requirements of UL 321 Standard.
- NPT or BSPT blowoff outlet on cover (blowoff outlets are furnished with plugs).
- Recessed seat in body assure accurate screen alignment.
- Round holes with 60 degrees staggered.
- Excellent flow characteristics and low pressure losses at high flow rates.
- Connection Ends: ASME B16.1 Class 125 or EN1092-2 PN10/16. (Other Flange Types Available Upon Request)
- Rated Working Pressure 175 psi.
- UL 321/ULC Listed.
- GOST Certificated.

Schematic

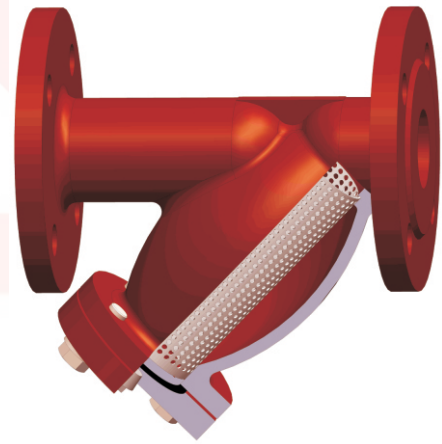

Corrosion Protection


- Fusion Bonded Coating Interior and Exterior meet or exceed all applicable of AWWA C550 Standard.

Options

- Spray Painted.

Material Specification

Part	Material	ASTM Specification
Body	Gray Cast Iron	A126 Class B
Cover	Gray Cast Iron	A126 Class B
Screen	Stainless Steel	A276 Type 304
Body/Cover Gasket	PTFE / Graphite	Commercial
Body/Cover Bolts	Carbon Steel	A307 Grade B
Plug	Malleable Iron	A47 Grade 22010

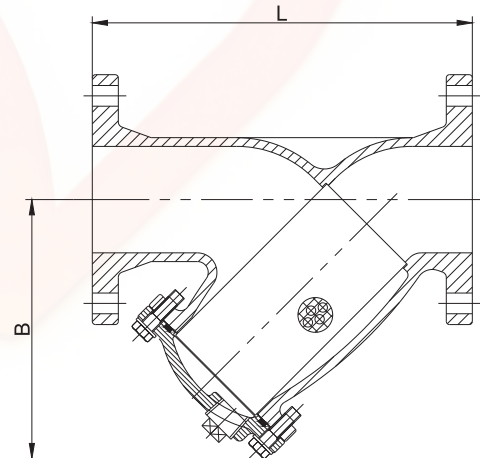

Standard Screens(mm/inch)

Size	Hole Diameter	Free Flow Area Opening
2.5"	3.0/0.12	53.60%
3" to 5"	4.3/0.17	55.43%
6" to 10"	6.0/0.24	63.00%
12"	6.3/0.25	40.70%

Main Dimensions (mm/inch)

Size	2.5	3	4	5	6	8	10	12
L	273/10.75	295/11.63	352/13.88	416/16.38	470/18.50	543/21.38	660/26.00	770/30.31
B	140/5.50	203/8.00	240/9.50	290/11.50	305/12.00	410/16.00	480/19.00	560/22.00
Plug Size	1"	1"	1"	1-1/4"	1-1/2"	1-1/2"	2"	2"

